



3G-DL40SWW

4.0" SQUARE WALL WASH
DOWNLIGHT

4.0" square, high performance downlight

JA8 certified with max 1500lm output

Regressed LED source for enhanced glare control

Proprietary wall wash optic and lens

Lumen range up to 3000lm (80+, 90+, and 97+ CRI options)

Remodel housing available along with other housing options

1% dimming standard with several integral driver options

JA8
TITLE 24

PROJECT:		TYPE:			
CATALOG#:		DATE:		QTY:	

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3G-DL40SWW	10 - 1000 LUMENS 15 - 1500 LUMENS * 22 - 2200 LUMENS 30 - 3000 LUMENS *JA8 (Title 24) max lumen output is 1500lm.	S80 - 80+ CRI ¹ H90 - 90+ CRI H97 - 97+ CRI ¹	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	WW - WALL WASH	UNV - 120/277V 120 - 120V 347 - 347V ²

DRIVER	FLANGE TYPE	BEVELED INSERT	HOUSING TYPE
DIM - 0-10V (100-1%) LE - PHASE DIM ³ (TRIAC/ELV, 100-1%) D01 - 0-10V (100-0.1%) DALI - DALI (100-1%) ⁴ DHL2 - LUTRON HI-LUME (1% ECOSYSTEM) DMX - DMX (100-0%)	WT - WHITE TRIM BT - BLACK TRIM ST - SILVER TRIM XTR - TRIMLESS (MUD-IN DRYWALL) MWF - FLANGELESS (MILLWORK) ⁵	WI - WHITE BI - BLACK SI - SILVER	RMD - REMODEL (NON-IC) NCF - NEW CONSTRUCTION FRAME (NON-IC) NC - NEW CONSTRUCTION HOUSING (CP RATED) IC - NEW CONSTRUCTION IC HOUSING ⁶

OPTIONS

CP - CHICAGO PLENUM⁷

BH - C-CHANNEL BAR HANGERS

EMR - EMERGENCY BATTERY (REMOTE) ⁸

Maximum 1 optical accessory

1 S80 not available in 27K. H97 available in 30K and 35K as standard

2 347 available in "DIM" 0-10V only (100-1%)

3 Phase dimming options available in 120V only

4 DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

5 MWF not available with Remodel (NON-IC)

6 New Construction IC housing available up to 2200lm

7 Chicago Plenum option available with New Construction Housing

8 Emergency battery installed remotely by others. Not accessible through the inside of the fixture




JA8 (Title 24) Listing available with 1500lm maximum
Available in 90CRI only
Driver options include "DIM" (0-10V) and "LE" (Phase dimming)

BASED ON WALL WASH OPTIC AND 3500K SOURCE

LUMEN OUTPUT	80+ CRI			90+ CRI			97+ CRI		
	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000LMs	668	10.4	64	588	10.4	57	548	10.4	53
1500LMs	904	14.2	64	796	14.2	56	742	14.2	52
2200LMs	1318	22.5	59	1160	22.5	52	1081	22.5	48
3000LMs	1727	31.8	54	1520	31.8	48	1416	31.8	45

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01

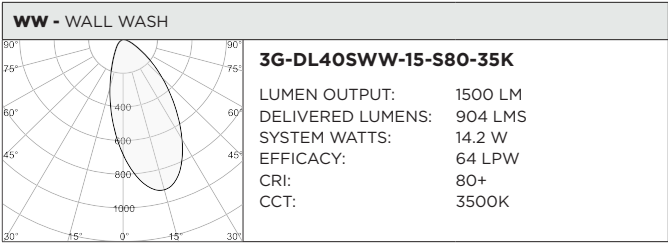

HOUSING

Remodel, new construction frame, and IC housing options available
Maximum ceiling thickness of 1.5". Consult factory for modifications
All housing options designed to be easily converted in field to trim or trimless with minimal components
Housing rated for #12 AWG (4 in, 4 out), 90°C conductors and through branch wiring

BEVELED INSERT

Cast aluminum beveled insert with matte powder coated finish
4.0" aperture with regressed LED source for enhanced glare control

TRIM

Cast aluminum trim flange with matte powder coated finish and minimal 0.375" overlap

TRIMLESS

Mudding flange features a perforated surface for easy mud-in application
Integral blocking support provided to ensure fixture is properly secured within ceiling structure

OPTICS

Regressed LED source for enhanced glare control
Proprietary wall wash optic
Asymmetrical lens provides uniformity and smooth illumination across and down the wall

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 No.250.0.
JA8 certified
Rated for indoor dry or damp locations

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

ELECTRICAL

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage drivers. Optional 347V, 0-10V drivers
120V Forward Phase/Reverse Phase driver option with 100-1% dimming range
eldoLED 0-10V driver option available with 100-0.01% dimming range
eldoLED DALI and Lutron EcoSystem driver options available with 100-1% dimming range
DMX driver option available with 100-0% dimming range
All drivers are integral and easily accessible through fixture aperture

EMERGENCY

Remote emergency battery installed by others (not accessible through fixture aperture)
7W output for 90 minutes (+/- 700lm at 80+ CRI)
CA Title 24 Certified
Maximum remote mounting distance:
50ft (12AWG) or 25ft (14AWG) for fixtures operating at 3000lm or below
30ft (12AWG) or 20ft (14AWG) for fixtures operating above 3000lm
Caution: Emergency Battery utilizes more than one power source and servicing should be performed by qualified personnel


LED SYSTEM

<2 SDCM LED module (field replaceable)
Standard (80+ CRI). Optional (90+ and 97+ CRI)
Available in 27K, 30K, 35K, and 40K
L90 >50,000 hours
5 Year Warranty


MOUNTING

Trim fixture designed for use in drywall, wood, acoustic, and other architectural ceilings
Trimless fixture designed for use in drywall, mud-in ceiling applications
Recommended ceiling cut-outs. Trim version (4 11/16" x 4 11/16").
Trimless version (5 1/16" x 5 1/16")
New construction frame ships with bar hangers (14" to 26" extension)
Standard new construction and IC housings available with optional c-channel bar hangers

RMD - REMODEL (NON-IC)

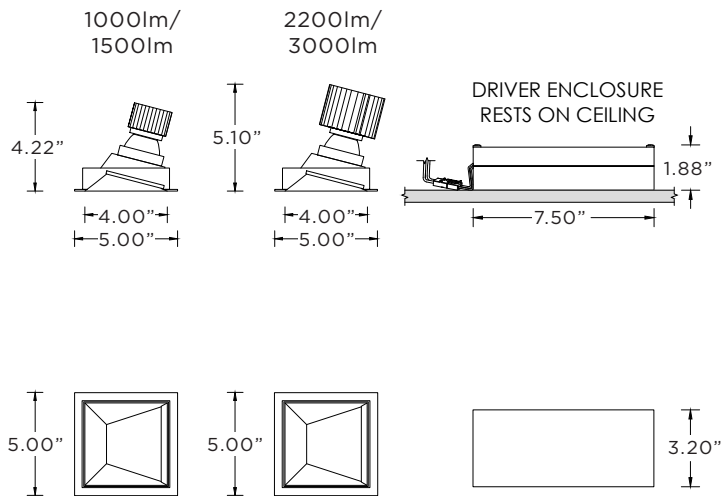


NCF - NEW CONSTRUCTION FRAME (NON-IC)

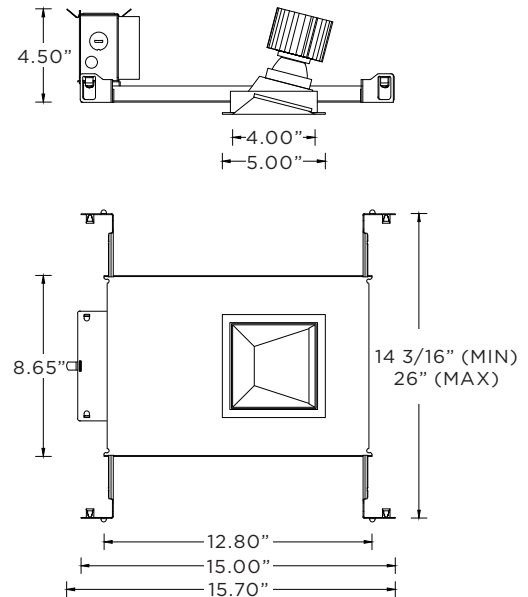


NC - NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)


IC - NEW CONSTRUCTION IC HOUSING (2200LM MAX)

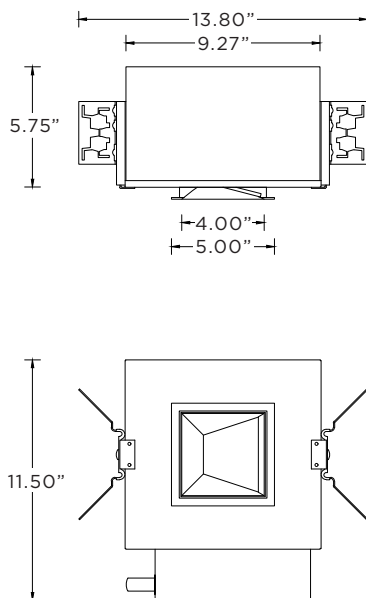

RMD - REMODEL (NON-IC)

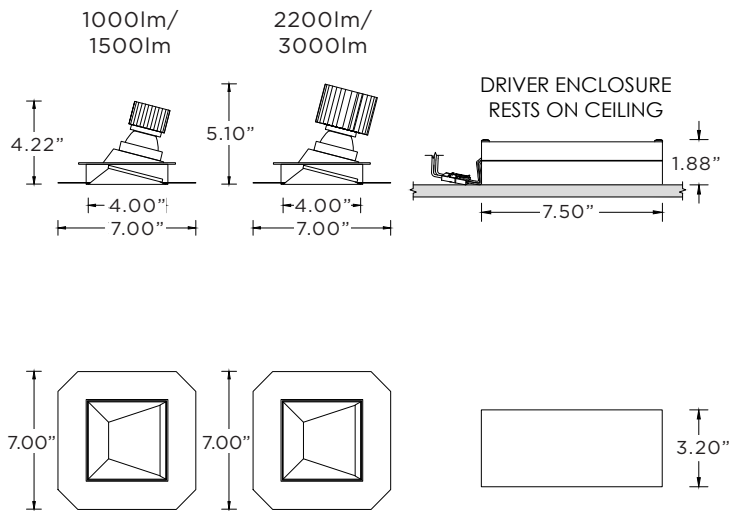

NCF - NEW CONSTRUCTION FRAME (NON-IC)

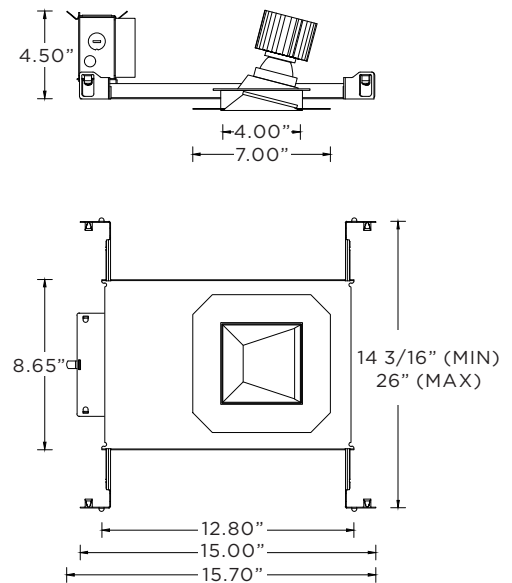

NC - NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)

IC - NEW CONSTRUCTION IC HOUSING (2200LM MAX)

