




3G-SDL33RA

3.3" ADJUSTABLE DOWNLIGHT
CYLINDER 7" AND 11" HEIGHT
DYNAMIC WHITE

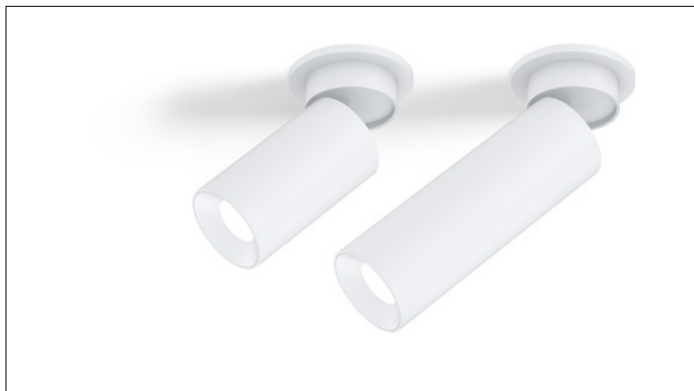

3GD 3GT

3.3" diameter high performance cylinders
Companion to 3G-DL33R series downlight family
Extruded aluminum housing with powder coated finish
Twist and lock construction and no visible hardware
Regressed LED source for enhanced glare control
Adjustable housing with 0-90° tilt and 360° rotation
Dim to Warm and Tunable White LED options up to 2000lm (90+CRI)
1% dimming standard with several integral driver options

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	FIXTURE HEIGHT	LED SOURCE	LUMEN OUTPUT	CRI	BEAM ANGLE
3G-SDL33RA	7H - 7" HEIGHT * 11H - 11" HEIGHT *7H available in Dim to Warm option only. Available in DIM and LE driver options only	DW - DIM TO WARM (1800-3000K) TW - TUNABLE WHITE ¹ (2700-6500K)	08 - 800 LUMENS 12 - 1200 LUMENS 20 - 2000 LUMENS	H90 - 90+ CRI	20D - 20° ² 30D - 30° 40D - 40° 50D - 50° 60D - 60° 90D - 90° * *90D reflector supplied standard with lens

VOLTAGE	DRIVER	HOUSING FINISH	INSERT FINISH
UNV - 120/277V 120 - 120V	DIM - 0-10V (100-1%) LE - PHASE DIM ³ (TRIAC/ELV, 100-1%) D01 - 0-10V (100-0.1%) ¹ DALI - DALI (100-1%) ^{1,4} DHL2 - LUTRON HI-LUME (1% ECOSYSTEM) DMX - DMX (100-0%) ¹ RDIM - REMOTE 0-10V (100-1%) RLE - REMOTE PHASE (TRIAC/ELV, 100-1%)	WH - WHITE BK - BLACK SV - SILVER CF - CUSTOM RAL COLOR	WI - WHITE BI - BLACK SI - SILVER CI - CUSTOM RAL COLOR





OPTIONS
LS - LINEAR SPREAD LENS SB - SANDBLASTED LENS SF - SOFTENING LENS (SUPPLIED STANDARD) CFW - WHITE CONDUIT FEED CANOPY CFB - BLACK CONDUIT FEED CANOPY CFS - SILVER CONDUIT FEED CANOPY FXC - SEAMLESS CANOPY OPTION * Maximum 1 optical accessory only Not available with 90D reflector option *Seamless canopy mount (FXC) must be installed prior to ceiling installation

- ¹ Tunable White option not available in 7" height. Available with D01 DALI and DMX drivers
² 20D reflector available with 800lm option only
³ Phase dimming options available in 120V only
⁴ DALI-2 (Type 6) provided as standard. Consult factory for DALI Type 8 option

3GD - Warm Dim
3GT - Tunable White





BASED ON 60° BEAM ANGLE AND 3000K SOURCE

LUMEN OUTPUT	90+ CRI		
	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
800LMs	N/A	N/A	N/A
1200LMs	1222	15.4	79
2000LMs	1715	23.2	74

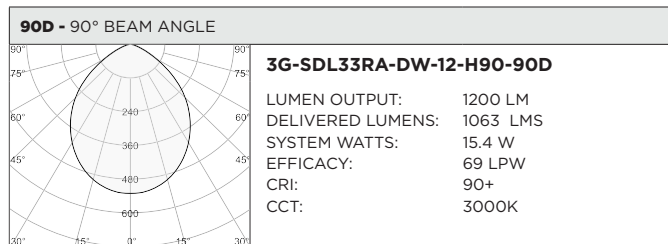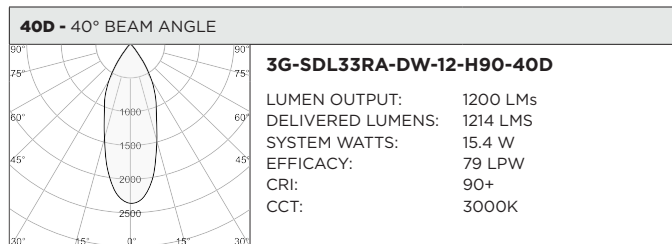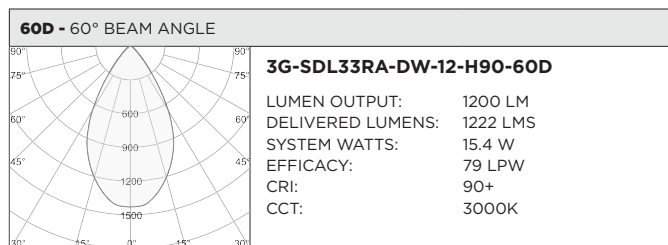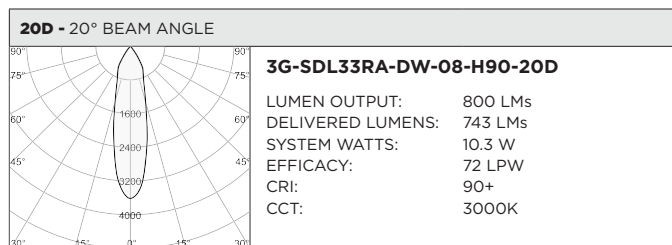

BASED ON 60° BEAM ANGLE

LUMEN OUTPUT	90+ CRI (2700K)			90+ CRI (3500K)			90+ CRI (6500K)		
	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
800LMs	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1200LMs	1136	16.6	68	1219	16.6	73	1342	16.6	81
2000LMs	1637	24.5	67	1670	24.5	68	1954	24.5	80

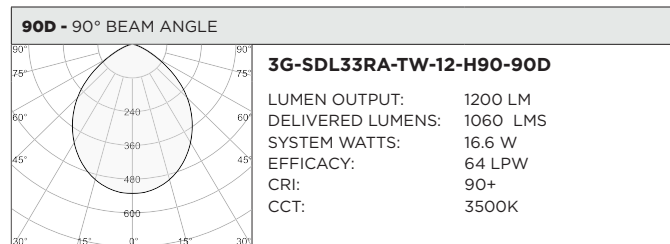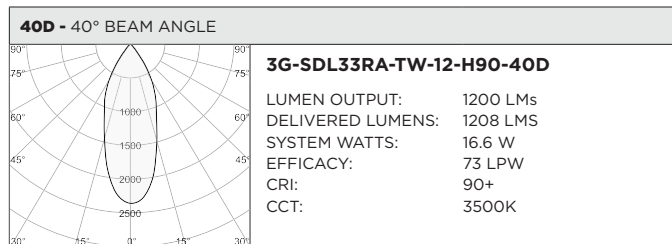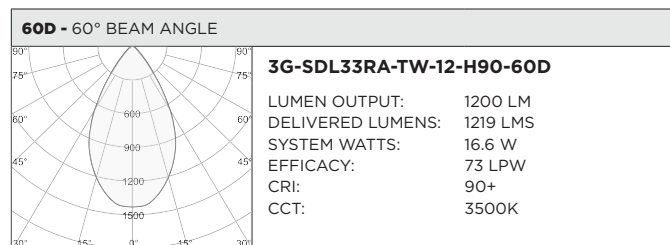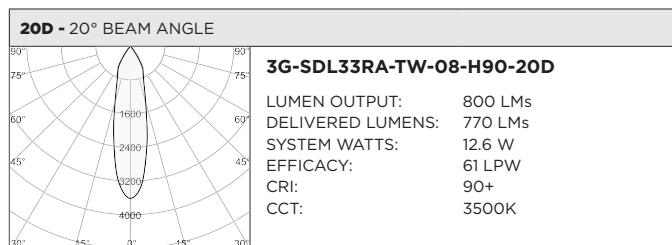

HOUSING

Extruded aluminum housing with powder coated finish
Twist and lock construction with no visible hardware
Adjustable housing with 0-90° tilt and 360° rotation features
proprietary swivel mechanism

BEVELED INSERT

3.3" aperture with regressed LED source for enhanced glare control
Cast aluminum insert with matte powder coated finish

OPTICS

Proprietary anodized, aluminum reflectors are field replaceable (20° reflector not interchangeable)
Available in 20°, 30°, 40°, 50°, 60° and 90°

MOUNTING

All hardware included for mounting to 4" octagonal junction box
Seamless canopy option designed to mount to 4" octagonal junction box for new construction only
Conduit feed cut-out canopy option designed to mount to 4" octagonal junction box
Twist and lock mechanism

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

ELECTRICAL

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage drivers
120V Forward Phase/Reverse Phase driver option with 100-1% dimming range
eldoLED 0-10V driver option available with 100-0.01% dimming range
eldoLED DALI and Lutron EcoSystem driver options available with 100-1% dimming range
DMX driver option available with 100-0% dimming range
All drivers are integral and easily accessible through fixture aperture

LED SYSTEM


Bridgelux LED module (field replaceable)
Color consistency <3 SDCM
Standard 90+ CRI
Dim to Warm (1800K-3000K)
Tunable White (2700K-6500K)
L70 >50,000 hours
5 Year Warranty

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 No.250.0.
Rated for indoor dry or damp locations


RECESSED 4" OCTAGONAL JUNCTION BOX BY OTHERS

STANDARD CANOPY MOUNT

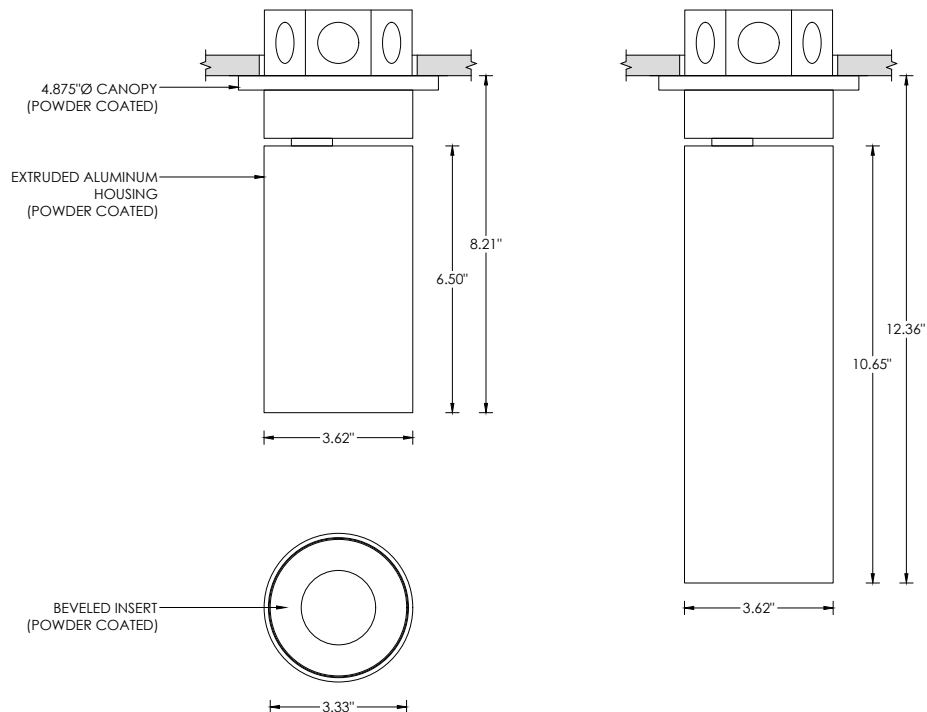


RECESSED 4" OCTAGONAL JUNCTION BOX BY OTHERS

SEAMLESS CANOPY MOUNT (FXC OPTION) FOR NEW CONSTRUCTION ONLY

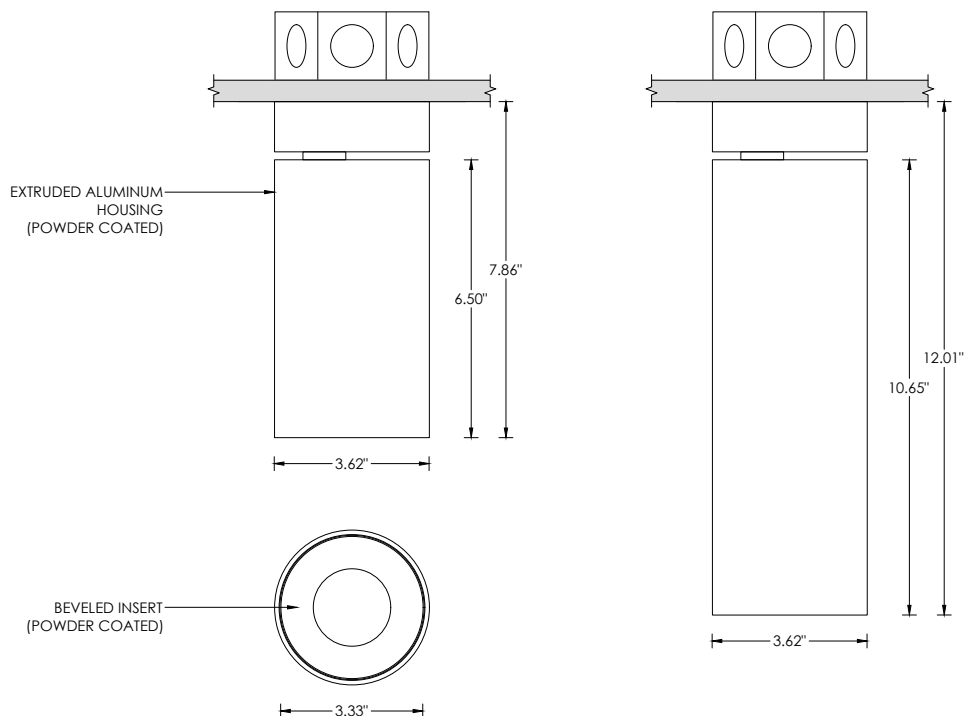

SURFACE 4" OCTAGONAL X 1.5" DEEP JUNCTION BOX BY OTHERS

CONDUIT FEED CANOPY MOUNT (CFX OPTION)

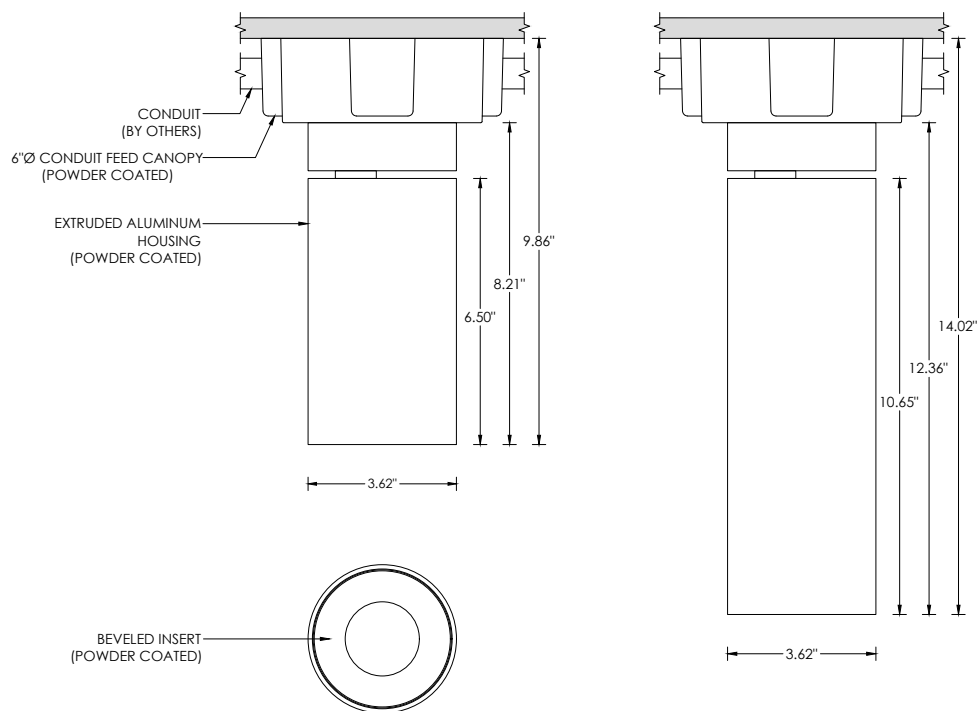

CONDUIT FEED CANOPY MOUNTING OPTIONS

