




ILLUMINATED OPTIONS


DL33R - 3.3" ROUND DOWNLIGHT



DL33S - 3.3" SQUARE DOWNLIGHT




DZ33R - 3.3" ROUND ZOIE




DZ33S - 3.3" SQUARE ZOIE



M7 - MADISON DUAL AXIS



4LI - 3.5" LINIA



INTEGRATED MECHANICAL OPTIONS

CM - CAMERA



SP - SPEAKER



OS - OCCUPANCY SENSOR



WF - WIFI ACCESS POINT



MC - MICROPHONE



HV - HVAC




SD - SMOKE DETECTOR



ST - FIRE STROBE



FS - FIRE SPRINKLER




JB - JUNCTION BOX









DL33R - 3.3" ROUND DOWNLIGHT



DL33RF - FIXED



DL33RA - ADJUSTABLE



DOWNLIGHT SIZE: 3.33"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+ *
COLOR CONSISTENCY <2 SDCM
UGR: <16

DELIVERED LUMENS: 1080 - 3779 LM **
EFFICACY: 88 - 105 LPW ***
WATTAGE: 10.3 - 43.1 W ***
L90: 50,000 HOURS

OPTICS: 20°, 40°, 60°, 90°



ADJUSTABILITY: 0° - 40° tilt and 362° lockable rotation

Machined aluminum faceplate with trimless downlight integration
Cast aluminum beveled insert with matte powder coated finish
3.3" aperture with regressed LED source for enhanced glare control
Proprietary anodized, aluminum reflectors are field replaceable (20° reflector not interchangeable)
All models provided standard with softening lens

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

* S80 not available in 27K
** Round adjustable available up to 2200 LM
*** Based on DL33RF, 80+ CRI, 60° and 35K


NOTE: ON CENTER SPACING = SECTION LENGTH/NUMBER OF DOWNLIGHTS

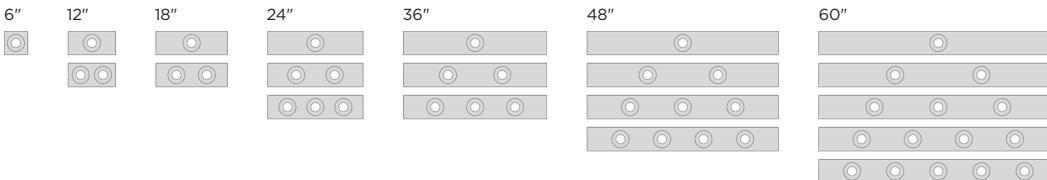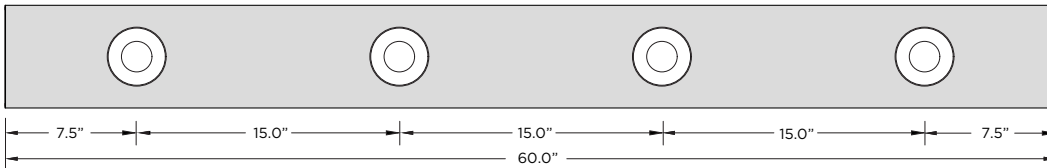

3.3" ROUND FIXED - BASED ON 60° BEAM, 80+ CRI AND 35K SOURCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	1080	10.3	105
1500 LM	1408	13.9	101
2200 LM	2132	21.9	97
3000 LM	2799	31.3	89


LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.98, 35K=1.00, 40K=1.01, 90+ CRI=0.88

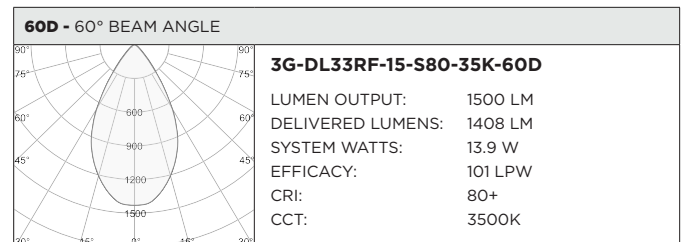









3.3" ROUND ADJUSTABLE - BASED ON 60° BEAM, 80+ CRI AND 35K SOURCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	874	10.3	85
1500 LM	1200	14.3	84
2200 LM	1780	22.5	79
3000 LM	2183	31.2	70

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.98, 35K=1.00, 40K=1.01, 90+ CRI=0.88

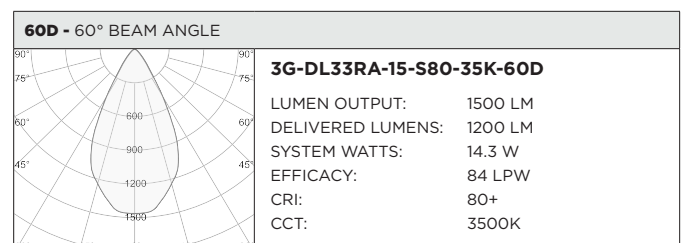

DL33S - 3.3" SQUARE DOWNLIGHT



DOWNLIGHT SIZE: 3.33"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+ *
COLOR CONSISTENCY <2 SDCM
UGR: <16

DELIVERED LUMENS: 925 - 3309 LM **
EFFICACY: 75 - 89 LPW ***
WATTAGE: 10.4 - 44.2 W ***
L90: 50,000 HOURS

OPTICS: 20°, 40°, 60°, 90°


ADJUSTABILITY: 0° - 40° tilt and 362° lockable rotation

Machined aluminum faceplate with trimless downlight integration
Cast aluminum beveled insert with matte powder coated finish
3.3" aperture with regressed LED source for enhanced glare control
Proprietary anodized, aluminum reflectors are field replaceable (20° reflector not interchangeable)
All models provided standard with softening lens

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

* S80 not available in 27K
** Square adjustable available up to 2200 LM
*** Based on DL33SF, 80+ CRI, 60° and 35K


NOTE: ON CENTER SPACING = SECTION LENGTH/NUMBER OF DOWNLIGHTS

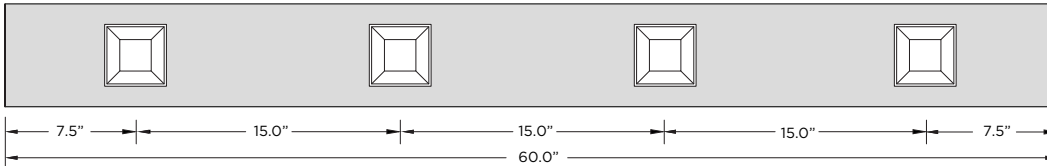

3.3" SQUARE FIXED - BASED ON 60° BEAM, 80+ CRI AND 35K SOURCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	925	10.4	89
1500 LM	1258	14.2	89
2200 LM	1832	22.5	81
3000 LM	2443	31.8	77


LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.98, 35K=1.00, 40K=1.01, 90+ CRI=0.88

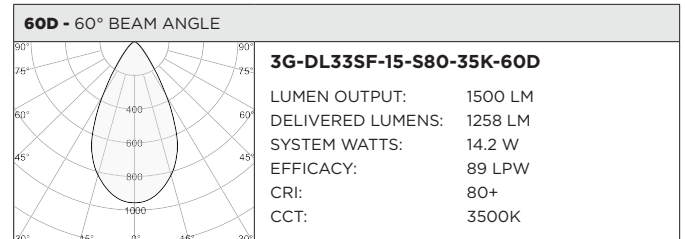



3.3" SQUARE ADJUSTABLE - BASED ON 60° BEAM, 80+ CRI AND 35K SOURCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	899	10.4	86
1500 LM	1212	14.2	85
2200 LM	1790	22.5	80
3000 LM	2111	31.8	66

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.98, 35K=1.00, 40K=1.01, 90+ CRI=0.88

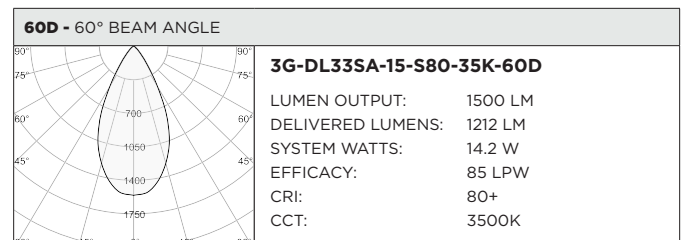

DZ33R - 3.3" ROUND ZOIE

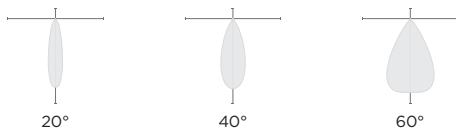

DOWNLIGHT SIZE: 3.33"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+
COLOR CONSISTENCY <2 SDCM
UGR: <10


DELIVERED LUMENS: 700 - 3000 LM
EFFICACY: 98 - 123 LPW *
WATTAGE: 5.7 - 30.7 W *
L90: 60,000 HOURS

OPTICS: 20°, 40°, 60°


Machined aluminum faceplate with trimless downlight integration
3.3" aperture with regressed LED source for maximum visual comfort
High gloss black or white louvers with proprietary optics and no glare
Proprietary, polycarbonate multi-faceted reflectors (field replaceable)

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

NOTE: ON CENTER SPACING = SECTION LENGTH/NUMBER OF DOWNLIGHTS

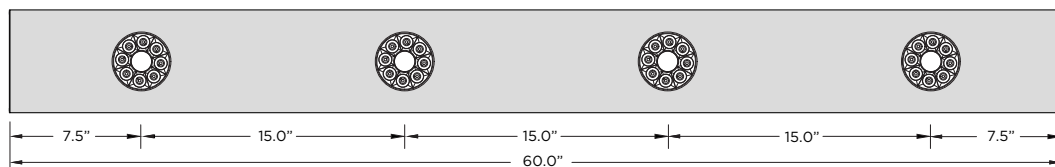


*Based on 80+ CRI, 40° and 3000K

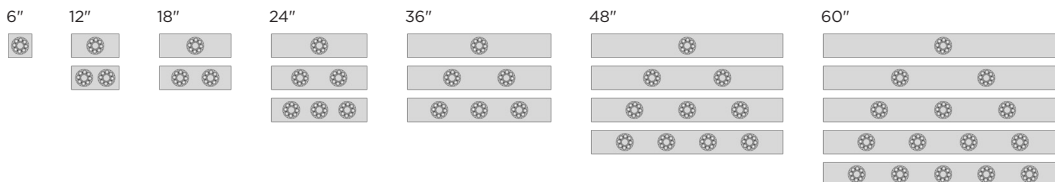



3.3" ROUND ZOIE - BASED ON 40° BEAM ANGLE AND 3000K SOURCE

80+ CRI			90+ CRI		
DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	8.5	117	1000	10.1	99
1500	13.1	115	1500	15.7	96
2200	20.3	108	2200	24.3	91
3000	30.7	98	N/A	N/A	N/A

LUMEN OUTPUT MULTIPLIER FOR 80CRI: 27K=N/A, 30K=1.00, 35K=0.98, 40K=1.06
LUMEN OUTPUT MULTIPLIER FOR 90CRI: 27K=0.80, 30K=0.85, 35K=0.86, 40K=N/A

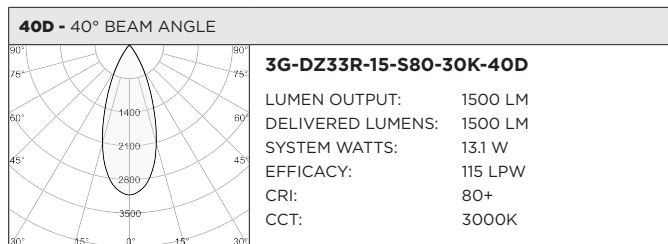

DZ33S - 3.3" SQUARE ZOIE

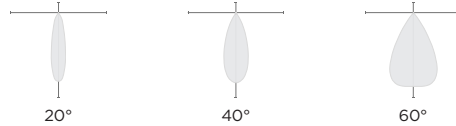

DOWNLIGHT SIZE: 3.33"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+
COLOR CONSISTENCY <2 SDCM
UGR: <10

DELIVERED LUMENS: 700 - 3000 LM
EFFICACY: 98 - 123 LPW *
WATTAGE: 5.7 - 30.7 W *
L90: 60,000 HOURS



OPTICS: 20°, 40°, 60°

Machined aluminum faceplate with trimless downlight integration
3.3" aperture with regressed LED source for maximum visual comfort
High gloss black or white louvers with proprietary optics and no glare
Proprietary, polycarbonate multi-faceted reflectors (field replaceable)

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

*Based on 80+ CRI, 40° and 3000K


NOTE: ON CENTER SPACING = SECTION LENGTH/NUMBER OF DOWNLIGHTS

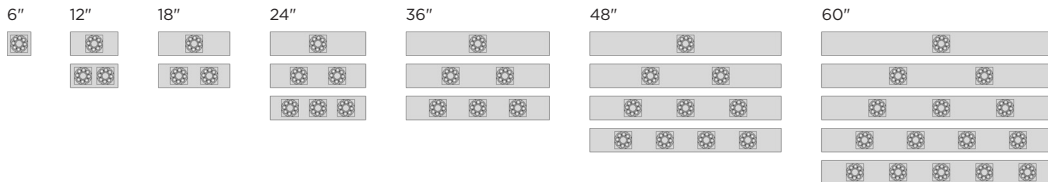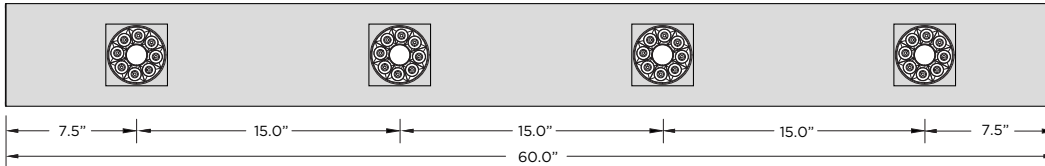




3.3" SQUARE ZOIE - BASED ON 40° BEAM ANGLE AND 3000K SOURCE

80+ CRI			90+ CRI		
DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	8.5	117	1000	10.1	99
1500	13.1	115	1500	15.7	96
2200	20.3	108	2200	24.3	91
3000	30.7	98	N/A	N/A	N/A

LUMEN OUTPUT MULTIPLIER FOR 80CRI: 27K=N/A, 30K=1.00, 35K=0.98, 40K=1.06
LUMEN OUTPUT MULTIPLIER FOR 90CRI: 27K=0.80, 30K=0.85, 35K=0.86, 40K=N/A

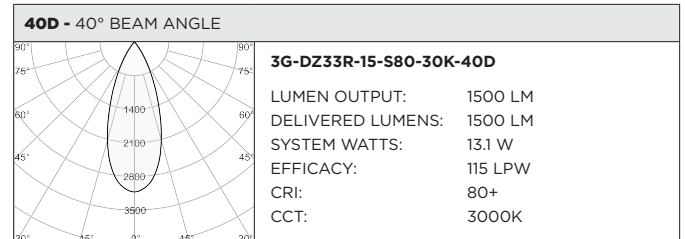

M7 - MADISON DUAL AXIS

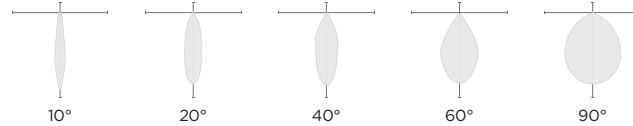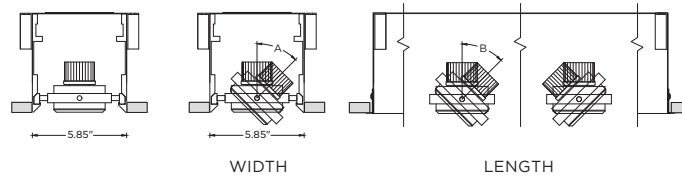

GIMBAL APERTURE: 2.75"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+ *
COLOR CONSISTENCY <2 SDCM

DELIVERED LUMENS: 1015 - 4207 LM
EFFICACY: 82 - 105 LPW **
WATTAGE: 10.3 - 47.3 W **
L90: 50,000 HOURS

OPTICS: 10°, 20°, 40°, 60°, 90°

ADJUSTABILITY:

LUMEN OUTPUT	A	B
Up to 1500lm	45°	45°
2200lm/3000lm	35°	45°
4000lm	20°	45°


Machined aluminum double gimbal with dual axis adjustability
Each double gimbal can be locked in place
Fixture heads are adjustable in field and can slide 18" in either direction

Regressed LED source for enhanced glare control
Proprietary anodized, aluminum reflectors are field replaceable (10° reflector not interchangeable)

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

* S80 not available in 27K
**Based on 80+ CRI, 20° and 3500K


NOTE: ON CENTER SPACING = SECTION LENGTH/NUMBER OF DOWNLIGHTS

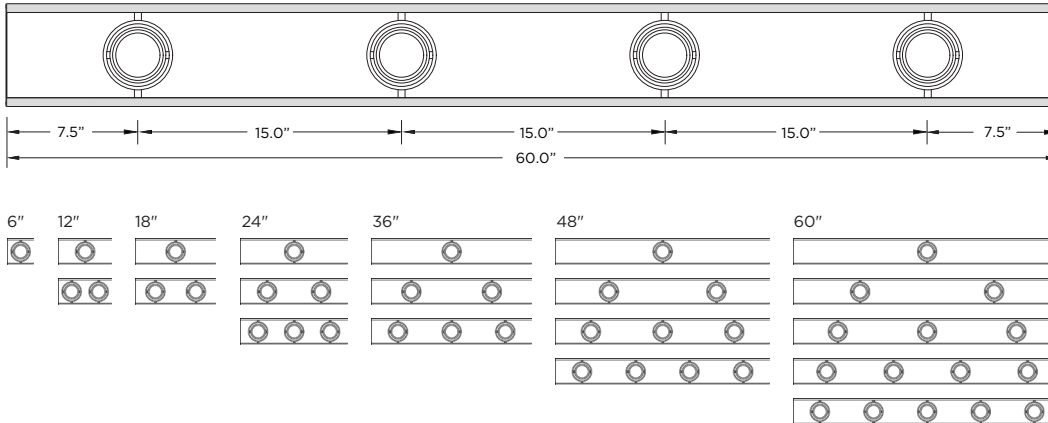

MADISON DUAL AXIS - BASED ON 20° BEAM ANGLE, 80+ CRI AND 3500K

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	1080	10.3	105
1500 LM	1444	14.0	103
2200 LM	2089	22.0	95
3000 LM	2815	31.3	90
4000 LM	3958	43.0	92




LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01, 90+ CRI=0.88

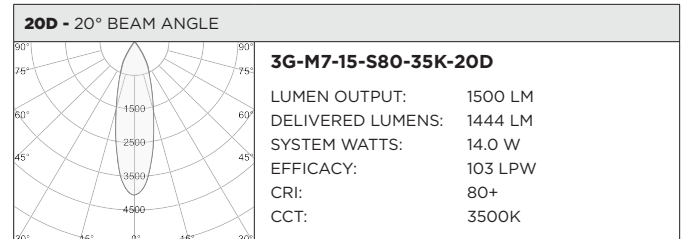

3G-M7-15-S80-35K-20D

LUMEN OUTPUT: 1500 LM
DELIVERED LUMENS: 1444 LM
SYSTEM WATTS: 14.0 W
EFFICACY: 103 LPW
CRI: 80+
CCT: 3500K

4LI - 3.5" LINIA

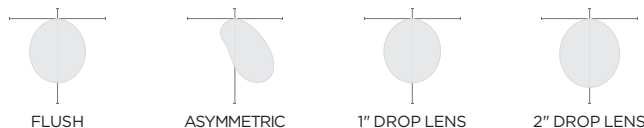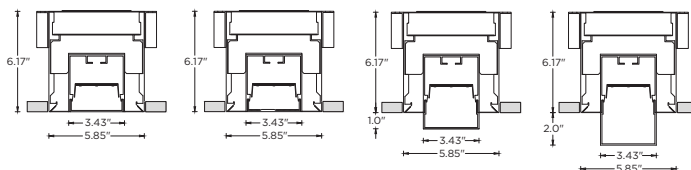

LINEAR APERTURE: 3.43"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 80+, 90+
R9 VALUE: 56
COLOR CONSISTENCY <3 SDCM

DELIVERED LUMENS: 250 - 1000 LM/FT
EFFICACY: 123 - 136 LPW *
WATTAGE: 1.9 - 8.1 W/FT *
L90: 60,000 HOURS


OPTICS: FLUSH,
ASYMMETRIC,
1" - 2" DROP LENS

Proprietary LED system

Extruded, satin acrylic lens
designed for optimal performance
and glare control
Lens options include flush, 1" and 2"
drops with illuminated end caps
High performance asymmetric
optics available

Standard 0-10V, constant current
drivers with 100-1% dimming range
and >0.9 power factor
Standard 120/277V universal
voltage with several driver options
All drivers are integral and easily
accessible through luminaire aperture


*Based on 80+ CRI and 3500K

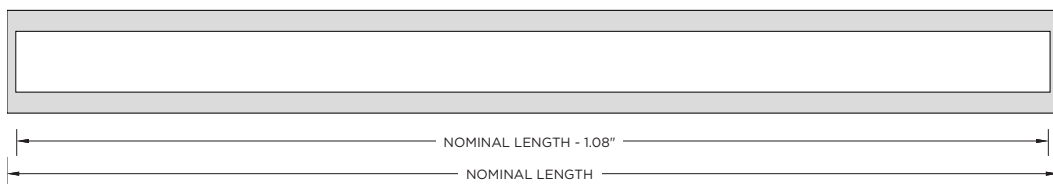

3.5" LINIA - BASED ON 80+ CRI AND 3500K SOURCE


LENS OPTION	DELIVERED LUMENS (LM/FT)	SYSTEM WATTS (W/FT)	EFFICACY (LPW)
FLUSH	250	1.9	129
	500	3.9	129
	750	6.0	127
	1000	8.1	123
1" DROP	250	1.9	133
	525	3.9	134
	775	6.0	132
	1025	8.1	128
2" DROP	275	1.9	136
	525	3.9	136
	800	6.0	134
	1050	8.1	129
ASYMMETRIC	250	1.9	131
	500	3.9	132
	750	6.0	128
	1000	8.1	124

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01, 90+ CRI=0.88

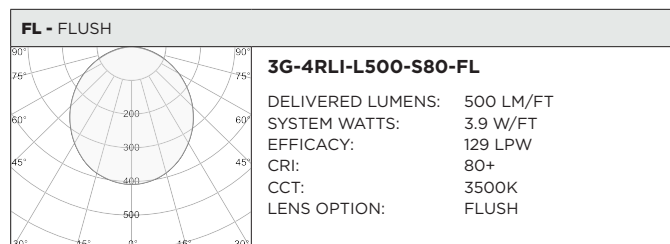


HARD CEILING

WT - TRIM




RECOMMENDED CEILING
OPENING 6.25"

XTR - TRIMLESS (DRYWALL)




RECOMMENDED CEILING
OPENING 6.25"

FX - FLANGELESS




RECOMMENDED CEILING
OPENING 5.90"

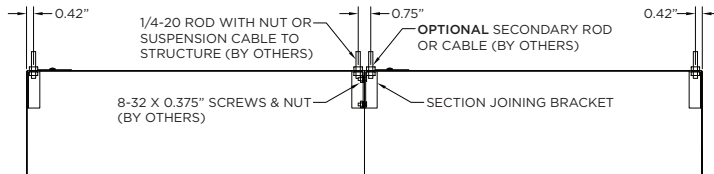


GRID CEILING MOUNTING


9L - 9/16" LAYIN




9TG - 9/16" TEGULAR







15L - 15/16" LAYIN



15TG - 15/16" TEGULAR



9ST - 9/16" SLOT TEE TEGULAR

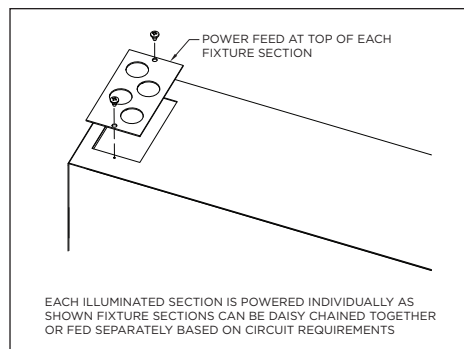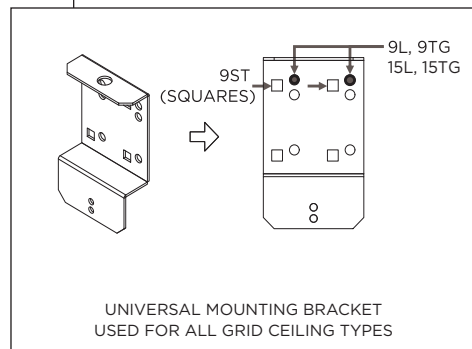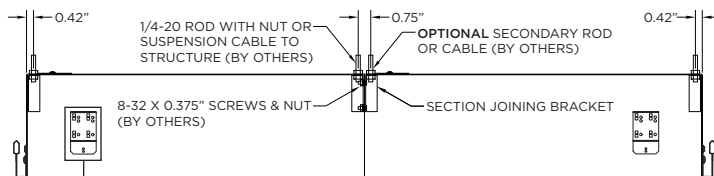

HOUSING

IC Housing constructed in extruded aluminum and cold rolled steel
Designed to integrate various illuminated and mechanical options
Individual units and continuous runs available in 1" increments
Standard matte black powder coated finish with optional matte white finish
Aluminum trim flange with matte white powder coated finish and minimal 0.400" overlap
Trimless model features a satin coat mudding flange for seamless ceiling integration
Maximum ceiling thickness of 3.75"

MOUNTING

New construction housing suspended via 1/4" threaded rod or suspension cables (by others)
Trim fixture designed for use in drywall, wood, and other architectural ceiling materials
Trimless fixture designed for use in drywall, mud-in ceiling applications
Flangeless fixture designed for use in wood ceilings
Suitable for various grid ceiling applications (see mounting details)


LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0.
Rated for indoor dry or damp locations
IC rated - Suitable for direct contact with insulation


WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C


STANDARD DOWNLIGHT SECTIONS AND TYPICAL SPACING (CONSULT 3G FOR CUSTOM CONFIGURATIONS)

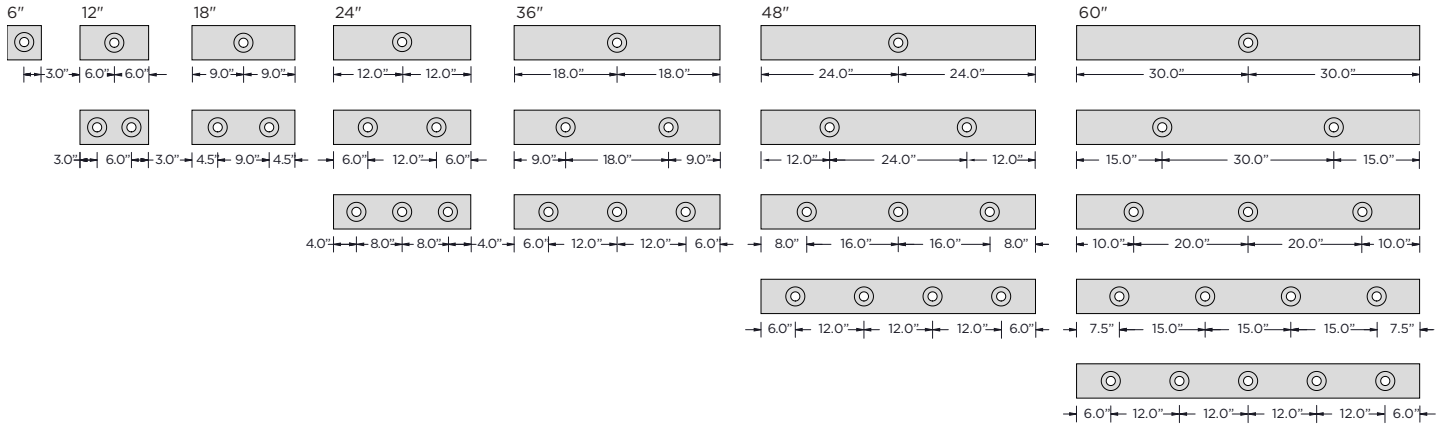

STANDARD MADISON GIMBAL SECTIONS AND TYPICAL SPACING (CONSULT 3G FOR CUSTOM CONFIGURATIONS)

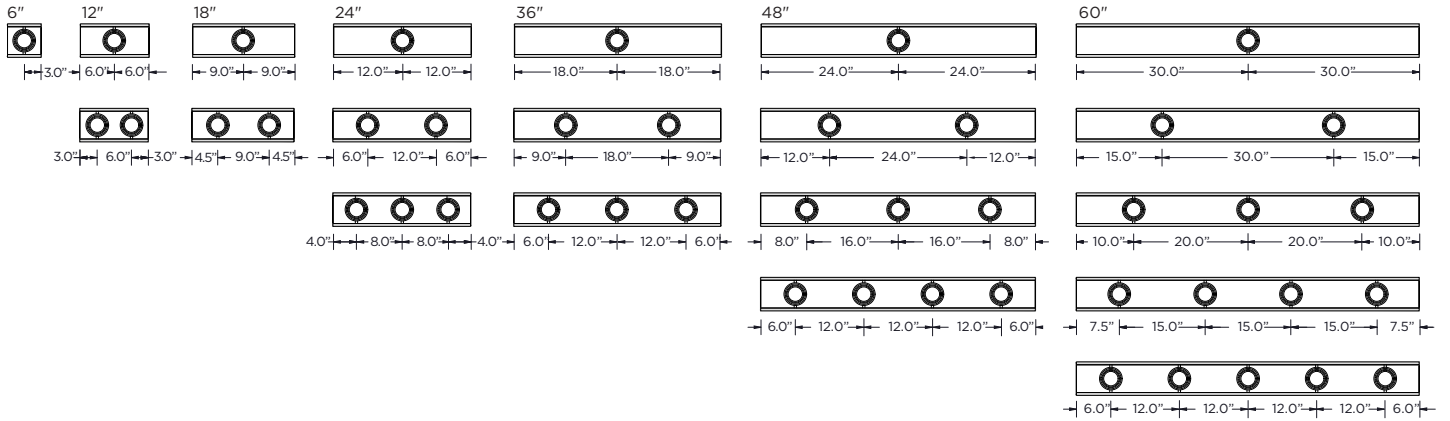


STANDARD LINIA SECTIONS (CONSULT 3G FOR CUSTOM CONFIGURATIONS)

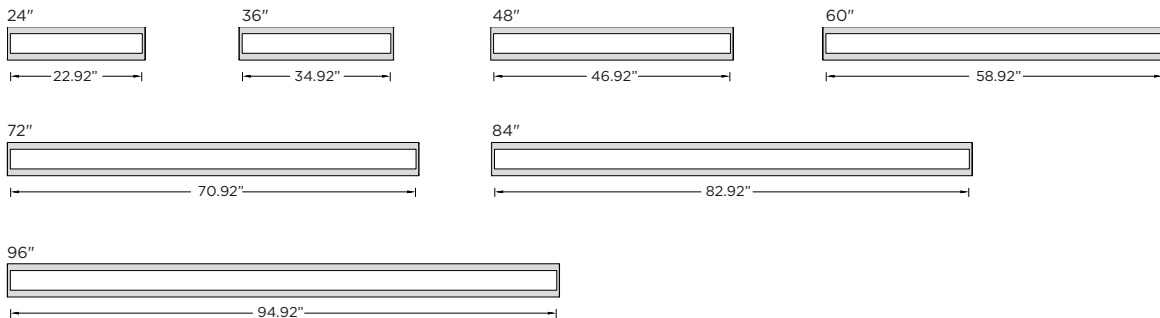

OS - OCCUPANCY SENSOR




Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Occupancy sensor by others



OSV SENSORSWITCH VERTEX


Wireless daylight and occupancy sensor
Compatible with 0-10V (100-1%) & (100-0.1%)

[SPEC SHEET](#)




**OSM
ENLIGHTED MICRO SENSOR - SU-5E**
Wireless daylight and occupancy sensor
Compatible with 0-10V (100-1%) & (100-0.1%)

[SPEC SHEET](#)




**OSE
ENCELIUM EN-CLM-PIR-DD-ZB**
Wireless daylight and occupancy sensor
Compatible with 0-10V (100-1%) & DALI

[SPEC SHEET](#)




**OSR
nLIGHT RES7**
Wireless daylight and occupancy sensor
Compatible with 0-10V (100-1%) & (100-0.1%)

[SPEC SHEET](#)



**OSF
LEGRAND FS-355**
Wired daylight and occupancy sensor
Compatible with 0-10V, Dali, Forward Phase, Ecosystem

[SPEC SHEET](#)



**OSA
LUTRON ATHENA**
Wireless daylight and occupancy sensor
Compatible with 0-10V (100-1%) & DALI



[SPEC SHEET](#)

NOTES:
All integrated component photos may vary from items shown on this specification sheet
Manufacturers or models not shown may be compatible with this 3Gi system
Please contact 3G for other options and custom configurations

CM - CAMERA



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Camera by others



CMA

AXIS - M3086-V DOME CAMERA

175° rotation, 80° tilt and 175° pan
Resolution: up to 2688 x 1512 pixels

[SPEC SHEET](#)

CMH

HONEYWELL - H3D2F1X



360° rotation, 180° tilt and 360° pan
Resolution: up to 1920 x 1080 pixels

[SPEC SHEET](#)

SP - SPEAKER



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Speaker by others



SPS

SONANCE - VP38R

100W Peak, 75Hz - 20kHz, +/-3 dB
Sensitivity: 83 dB

[SPEC SHEET](#)

SPO

ORIGIN ACOUSTICS D39



100W Peak, 100Hz - 20kHz
Sensitivity: 84 dB

[SPEC SHEET](#)

MC - MICROPHONE (BY OTHERS)



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Microphone by others

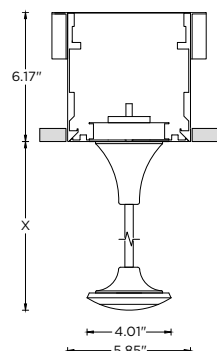

MCA

AUDIX - M70

[SPEC SHEET](#)

MCL

LOGITECH - RALLY MIC POD

[SPEC SHEET](#)


NOTES:

All integrated component photos may vary from items shown on this specification sheet
Manufacturers or models not shown may be compatible with this 3Gi system
Please contact 3G for other options and custom configurations

LINEAR HVAC DIFFUSER INTEGRATION (ALL COMPONENTS SUPPLIED BY OTHERS)

Machined aluminum faceplate provided by 3G with cut-out opening suitable for various HVAC models
Typical diffuser integration shown. Various models compatible with Krueger, Nailor, Price, Titus and Tuttle & Bailey
All components including plenum inlet and diffuser by others
Available in 2', 3', 4, and 5' lengths as standard
Please contact 3G for other options, custom lengths or custom configurations

2 SLOT DIFFUSER

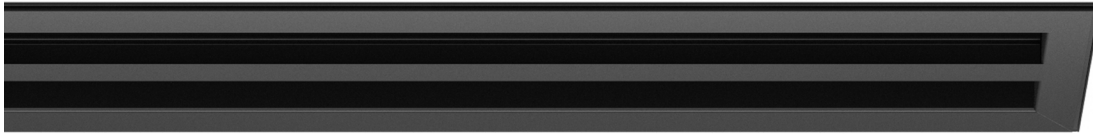


1 SLOT DIFFUSER




TRIMLESS SLOT DIFFUSER




2 SLOT DIFFUSER*

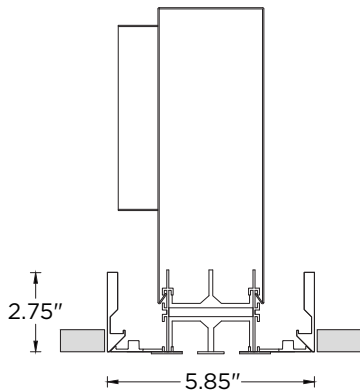

1 SLOT DIFFUSER*


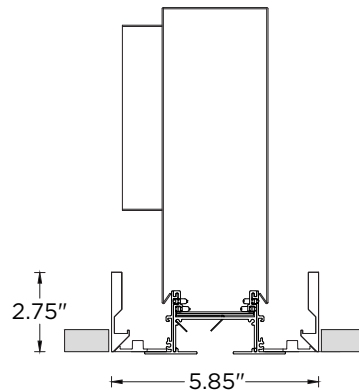



TRIMLESS SLOT DIFFUSER*

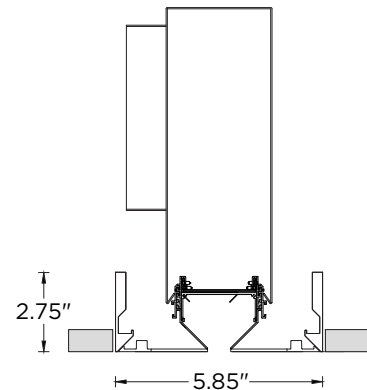



*plenum inlet and diffuser supplied and installed by others
see standard models and compatibility list on following pages

TITUS DIFFUSER MODEL SELECTION
(ALL COMPONENTS SUPPLIED BY OTHERS)

	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	FL10	66	ECXX
	FL15	66	ECXX
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	FL10	55	ECXX
	FL15	55	ECXX
	FL20	55	ECXX






END CONDITION	
ECXX	



NOTE: DIFFUSER LENGTH MUST BE 1.50" SHORTER THAN NOMINAL LENGTH

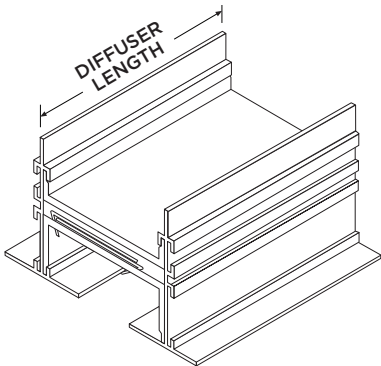


NOMINAL HVAC LENGTH	DIFFUSER LENGTH
24"	22.5" MAX
36"	34.5" MAX
48"	46.5" MAX
60"	58.5" MAX


PRICE DIFFUSER MODEL SELECTION
(ALL COMPONENTS SUPPLIED BY OTHERS)

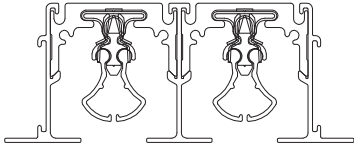	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	SDS50/1	9A	X-X
	SDS50/1	14	Z-Z
	SDS50/1	916	Z-Z
	SDS75/1	9A	X-X
	SDS75/1	14	Z-Z
	SDS75/1	916	Z-Z
	SDS100/1	9A	X-X
	SDS100/1	14	Z-Z
	SDS100/1	916	Z-Z
	SDS50/2	9A	X-X
	SDS50/2	14	Z-Z
	SDS50/2	916	Z-Z
	SDS75/2	9A	X-X
	SDS75/2	14	Z-Z
	SDS75/2	916	Z-Z
	SDS100/2	9A	X-X
	SDS100/2	14	Z-Z
	SDS100/2	916	Z-Z
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	SDS150	9A	X-X
	SDS150	14	Z-Z
	SDS150	916	Z-Z
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	CF-1x1.0"SLOT	EF	X-X
	CF-1x1.5"SLOT	EF	X-X
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	CF	VF	X-X
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	SDR150	9A	X-X
	SDR150	14	Z-Z
	SDR150	916	Z-Z

END CONDITION	
X-X	
Z-Z	

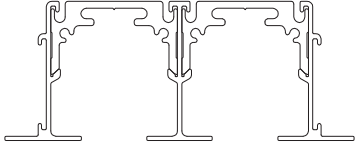
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	SDR50/1	9A	X-X
	SDR50/1	14	Z-Z
	SDR50/1	916	Z-Z
	SDR75/1	9A	X-X
	SDR75/1	14	Z-Z
	SDR75/1	916	Z-Z
	SDR100/1	9A	X-X
	SDR100/1	14	Z-Z
	SDR100/1	916	Z-Z
	SDR50/2	9A	X-X
	SDR50/2	14	Z-Z
	SDR50/2	916	Z-Z
	SDR75/2	9A	X-X
	SDR75/2	14	Z-Z
	SDR75/2	916	Z-Z
	SDR100/2	9A	X-X
	SDR100/2	14	Z-Z
	SDR100/2	916	Z-Z

NOTE: DIFFUSER LENGTH MUST BE 1.50" SHORTER THAN NOMINAL LENGTH

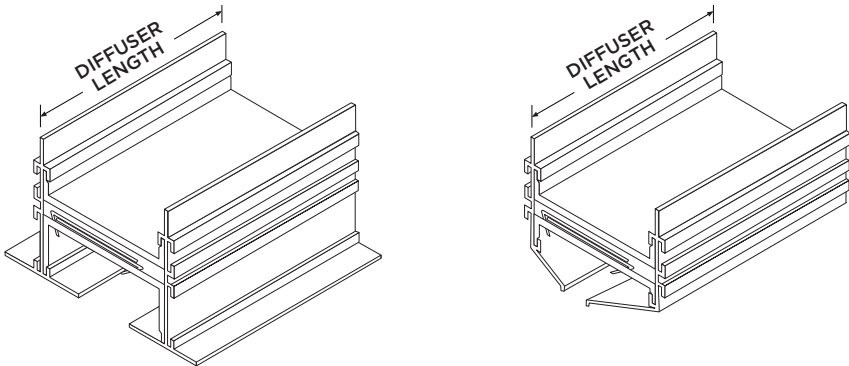



NOMINAL HVAC LENGTH	DIFFUSER LENGTH
24"	22.5" MAX
36"	34.5" MAX
48"	46.5" MAX
60"	58.5" MAX


NOTE: FLANGE LENGTH CANNOT EXCEED NOMINAL LENGTH

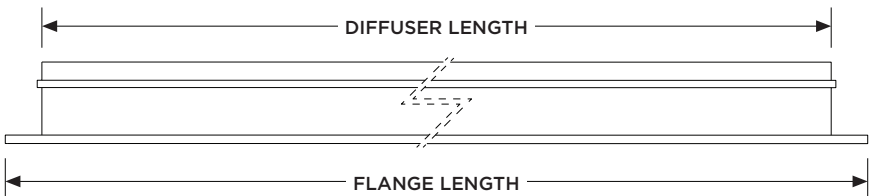


NOMINAL HVAC LENGTH	FLANGE LENGTH
24"	24" MAX
36"	36" MAX
48"	48" MAX
60"	60" MAX

KREUGER DIFFUSER MODEL SELECTION
(ALL COMPONENTS SUPPLIED BY OTHERS)

	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	1950/1	A	E
	1950/2	A	E
	1975/1	A	E
	1975/2	A	E
	1910/1	A	E
	1910/2	A	E
	1915/1	A	E
	1920/1	A	E
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	DFL/1	FF	E
	DFL/1.5	FF	E


END CONDITION	
E	

NOTE: DIFFUSER LENGTH MUST BE 1.50" SHORTER THAN NOMINAL LENGTH

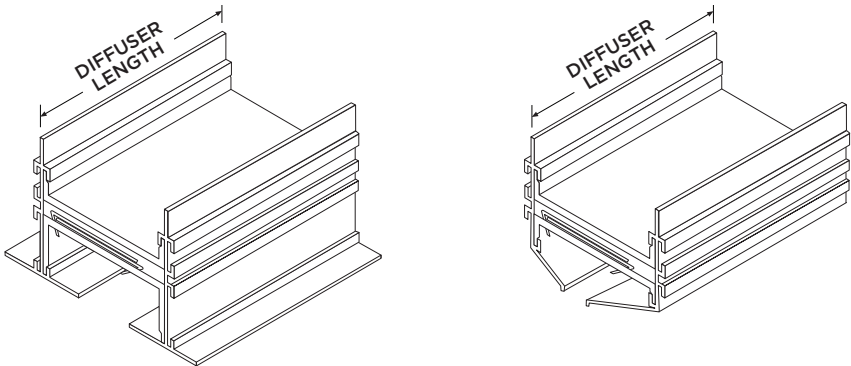



NOMINAL HVAC LENGTH	DIFFUSER LENGTH
24"	22.5" MAX
36"	34.5" MAX
48"	46.5" MAX
60"	58.5" MAX


NOTE: FLANGE LENGTH CANNOT EXCEED NOMINAL LENGTH

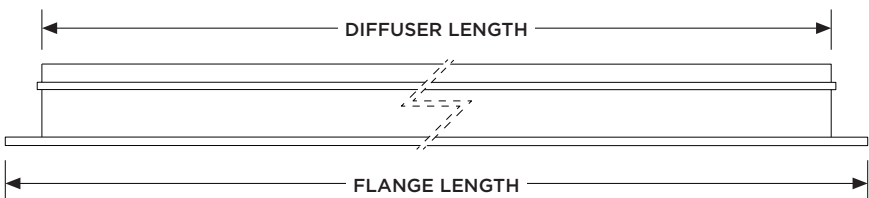


NOMINAL HVAC LENGTH	FLANGE LENGTH
24"	24" MAX
36"	36" MAX
48"	48" MAX
60"	60" MAX

TUTTLE & BAILEY DIFFUSER MODEL SELECTION
(ALL COMPONENTS SUPPLIED BY OTHERS)

	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	AIR-TRAC/1	B	FEC P
	AIR-TRAC/1.5	B	FEC P
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	AIR-TRAC/1	N	FEC P
	AIR-TRAC/1.5	N	FEC P
	AIR-TRAC/2	N	FEC P



END CONDITION	
FEC P	



NOTE: DIFFUSER LENGTH MUST BE 1.50" SHORTER THAN NOMINAL LENGTH

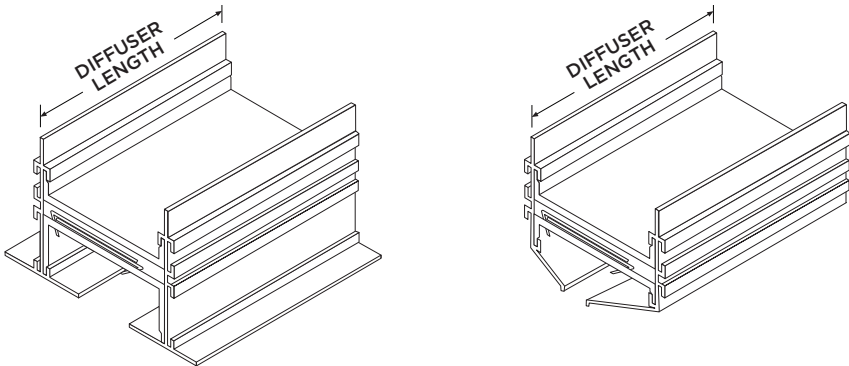


NOMINAL HVAC LENGTH	DIFFUSER LENGTH
24"	22.5" MAX
36"	34.5" MAX
48"	46.5" MAX
60"	58.5" MAX

NAILOR DIFFUSER MODEL SELECTION
(ALL COMPONENTS SUPPLIED BY OTHERS)

	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	FLH10/1	AA	MM
	FLH15/1	AA	MM
	FLR10/1	AA	MM
	FLR15/1	AA	MM
	FLV10/1	AA	MM
	FLV15/1	AA	MM
	DIFFUSER MODEL	BORDER TYPE	END CONDITION
	FLH10/1	KK	CC
	FLH15/1	KK	CC
	FLH20/1	KK	CC
	FLV10/1	KK	CC
	FLV20/1	KK	CC


END CONDITION	
MM	
CC	

NOTE: DIFFUSER LENGTH MUST BE 1.50" SHORTER THAN NOMINAL LENGTH

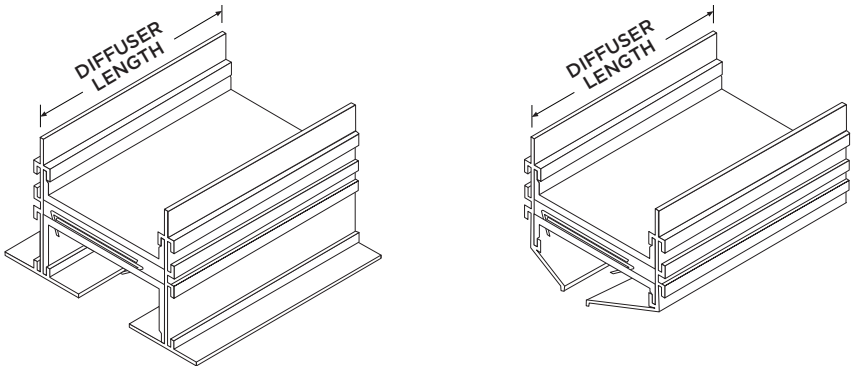

NOMINAL HVAC LENGTH	DIFFUSER LENGTH
24"	22.5" MAX
36"	34.5" MAX
48"	46.5" MAX
60"	58.5" MAX

NOTE: FLANGE LENGTH CANNOT EXCEED NOMINAL LENGTH


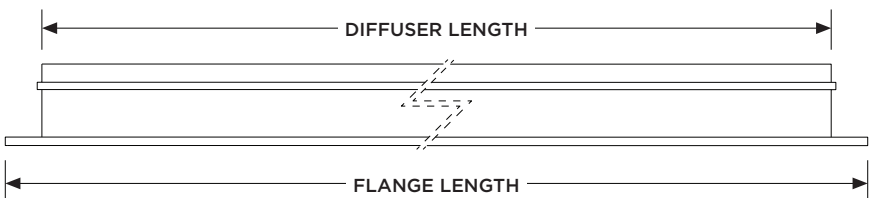


NOMINAL HVAC LENGTH	FLANGE LENGTH
24"	24" MAX
36"	36" MAX
48"	48" MAX
60"	60" MAX

SD - SMOKE DETECTOR



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Smoke detector by others



SDE

EDWARDS - SIGA-PCD

Smoke + carbon monoxide detection
Wired

[SPEC SHEET](#)

SDG

GOOGLE NEST PROTECT AND CO ALARM



Smoke + carbon monoxide detection
Wired

[SPEC SHEET](#)

ST - FIRE STROBE



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Fire strobe by others



STS

SYSTEM SENSOR - L-SERIES - PC2WL

Strobe Horn
Wired, mounts to a junction box

[SPEC SHEET](#)

STK

KIDDE P4010ACLEDSCOCA

Fire Strobe + Smoke + carbon monoxide detection
Wired, mounts to a junction box

[SPEC SHEET](#)



FS - FIRE SPRINKLER CONCEALED



FS - FIRE SPRINKLER EXPOSED



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Fire sprinkler by others



FSV

VIKING VK462

Standard and concealed

[SPEC SHEET](#)



NOTES:

All integrated component photos may vary from items shown on this specification sheet
Manufacturers or models not shown may be compatible with this 3Gi system
Please contact 3G for other options and custom configurations

WF - WIFI ACCESS POINT



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Wifi access point by others



WFC
CISCO 145AC
2.4GHz & 5GHz
Up to 867 Mbps

[SPEC SHEET](#)


WFE
ENGENIUS - EWS357AP
2.4 GHz & 5GHz
Up to 1200 Mbps

[SPEC SHEET](#)

JB - JUNCTION BOX



Machined aluminum faceplate and adapting hardware by 3G
Faceplate powder coated to match housing finish
5.85" x 6.00" long section
Junction box by others



JBO
Standard octagonal J-box
4.00" diam x 1.50" deep

[SPEC SHEET](#)

NOTES:
All integrated component photos may vary from items shown on this specification sheet
Manufacturers or models not shown may be compatible with this 3Gi system
Please contact 3G for other options and custom configurations